

## DS-KIS703Y-P Two-wire Video Intercom Kit



- Indoor Station: 7" touch screen 2-Wire IP indoor station with 1024 × 600 resolution
- Indoor Station: Convenient Hik-Connect APP Mobile Control: receive calls, open the door and live view remotely
- Indoor Station: Easy wizard for quick set up
- Indoor Station: Live-view of the door station
- Indoor Station: Support voice messages when no response from the indoor station
- Door Station: High quality imaging with 2 MP resolution
- Door Station: One call physical button for easier calls
- Door Station: Two-lock control
- Door Station: IP65 protection level
- Door Station: Directly provide 12 V, 500 mA power output for one electronic lock without additional power supply
- Door Station: High-quality stainless steel panel

## ▪ Specification


Door station	
Operation system	Embedded Linux operation system
Operation mode	Single-button
Flash	32 MB
RAM	256 MB
Door station	
Camera	2 MP HD camera
Resolution	Main stream: 1280*720P, 1920*1080p Sub stream: 640*480
Night vision	Low illumination IR supplement distance: 3 m
WDR	Support
Field of view	Horizontal: 140° Vertical: 85°
Video Compression Standard	H.264
Door station	
Audio input	Built-in 1*omnidirectional microphone
Audio output	Built-in 1*loudspeaker, 8Ω
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U, G.711 A
Audio compression Rate	64 Kbps
Door station	
Network protocol	TCP/IP, RSTP, SIP2.0
Wired network	Support, 2-Wire wiring
Door station	
RS-485	/
Alarm input	2( Exit button or door contact)
Output	1*12 V/500 mA output
Two-wire interface	1
TAMPER switch	1
Door station	
Power consumption	< 10 W
Working temperature	-40° C to +60° C(-40° F to 140° F)
Working humidity	10% to 95%
Installation	Surface mounting, flush mounting
Protection level	IP65
Indicator	3
Power supply	From indoor station
Indoor station	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB
Indoor station	
Display screen	7-inch TFT touch screen
Display resolution	1024 × 600

Operation method	Capacitive touch screen
Brightness	Adjustable
<b>Indoor station</b>	
Audio input	Built-in 1*omnidirectional microphone
Audio output	Built-in 1*loudspeaker, 8Ω
Audio quality	Noise suppression and echo cancellation
Volume	Local adjustable
Audio compression standard	G.711 U, G.711 A
<b>Indoor station</b>	
Wired network	1*10 Mbps through 2-wire interface
Wireless network	Wi-Fi 802.11 b/g/n, 2.400-2.4835 GHz
<b>Indoor station</b>	
RS-485	1
Alarm input	8
Two-wire (output)	1
Two-wire (input)	1
Power input	24 VDC/1.5 A
<b>Indoor station</b>	
Power supply	24 VDC/1.5 A
Power consumption	≤ 8 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%


## ▪ Available Model

DS-KIS703Y-P


▪ Dimension

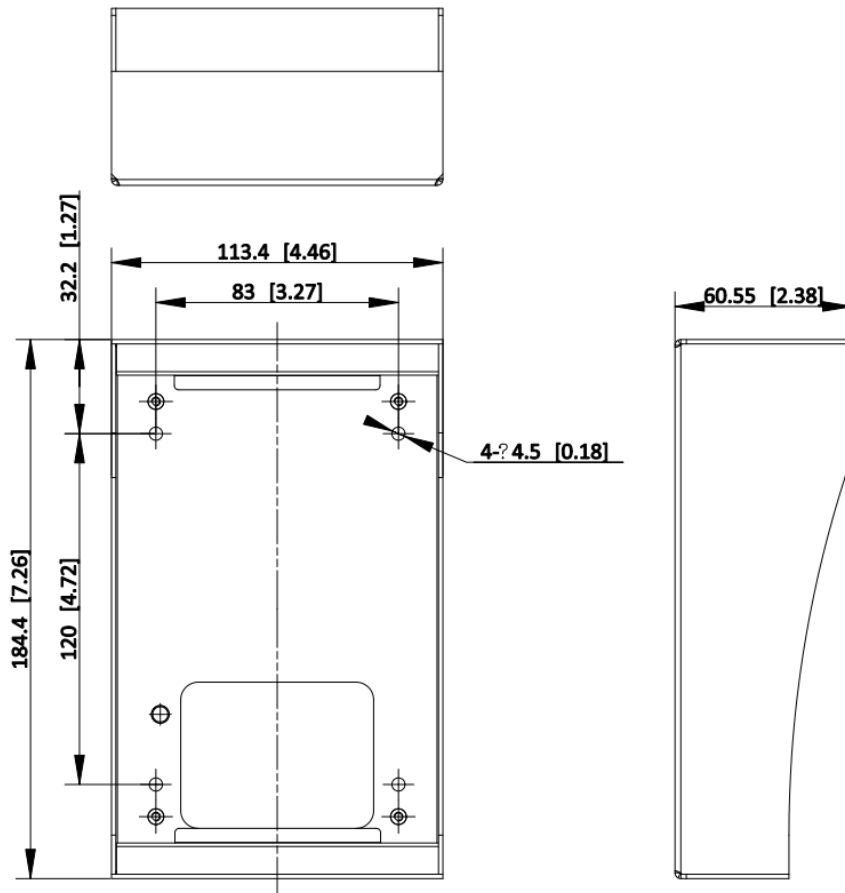

Unit:mm [inch]

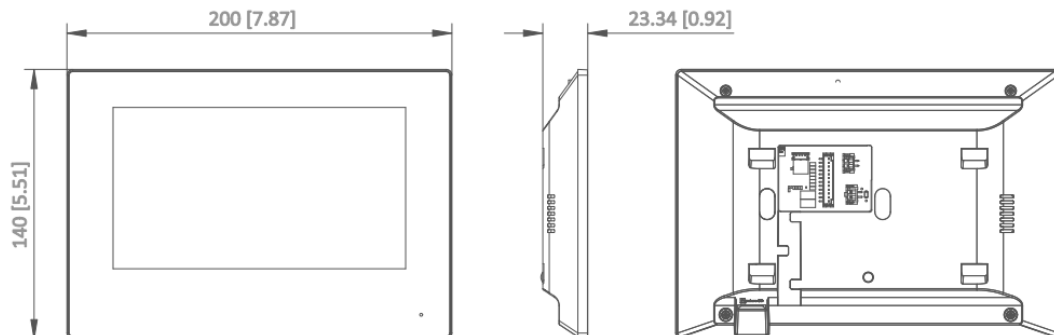


Unit:mm [inch]

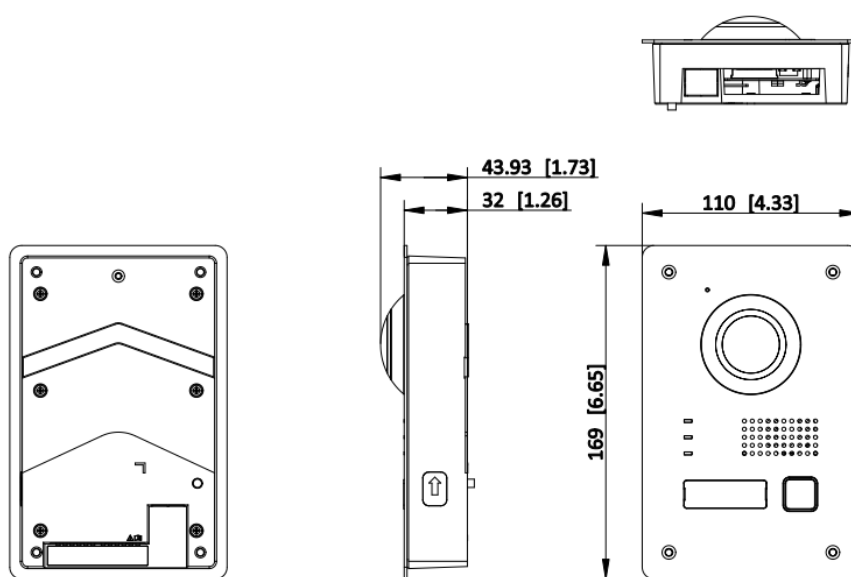

Unit:mm [inch]

- Accessory
- Included

**DS-KABV8103-RS**  
**Protective shield**



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

