






OLS1000ERT2UA/OLS2000ERT2UA
OLS3000ERT2UA



TRUSTWORTHY ONLINE UPS TO SAFEGUARD DATA CENTER



The high-performance online double-conversion UPS that offers reliable power protection


Designed for office and data center applications, the Online S Series adopts double-conversion topology to provide seamless Pure Sine Wave output. The UPSs feature color LCD panel for users to monitor power system and configure settings easily. The products also provide relay-type dry contact to perform local management. Extended battery module auto-detection assists users to estimate UPS's runtime by automatically detecting the quantity of connected Extended Battery Modules (EBM). The variable speed fans provide automatic thermal management based on power load to reduce noise and provide greater comfort for users.

SERIES FEATURES

- Online (Double Conversion) UPS Topology
- ECO Mode
- Generator Compatible
- Overload Protection
- Zero Transfer Time
- Smart Battery Management (SBM)
- Extended Battery Module Auto-detection
- Surge and Spike Protection
- Critical/Non-critical Load Outlets
- EMI and RFI Filtration
- Phone/Fax/Modem/DSL/Network Protection
- Color LCD Panel
- Variable Speed Fans
- Emergency Power Off (EPO) Port
- PowerPanel Management Software
- SNMP/HTTP Remote Management Capability (Optional)

PRODUCT CALLOUTS

1. Power On/Off Switch
2. LCD Display Panel
3. Function Button(s)
4. Battery Backup & Surge Protected Outlets
5. AC Inlet
6. Input Circuit Breaker
7. Serial Port
8. USB Port
9. EPO Port
10. Communication Protection Ports RJ-11/RJ-45
11. Extended Battery Module Detection Connector
12. Relay-type Dry Contact
13. SNMP/HTTP Network Slot
14. Extended Battery Module Connector

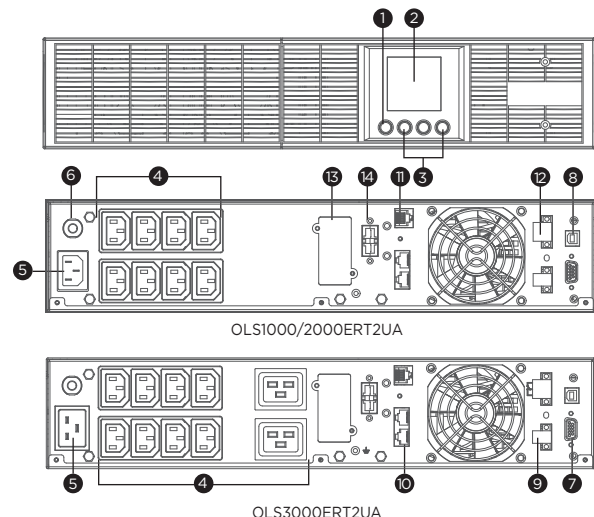



TECHNICAL SPECIFICATIONS

Model Name	OLS1000ERT2UA	OLS2000ERT2UA	OLS3000ERT2UA
General			
UPS Topology	Online Double Conversion		
Energy Saving Technology	Online ECO Mode Efficiency > 95%		
Active PFC Compatibility	Yes		
Input			
Generator Compatibility	Yes		
Nominal Input Voltage (Vac)	230 ± 10%		
Input Voltage Range (Vac)	160 - 300	190 - 300	
Input Frequency (Hz)	50 ± 10, 60 ± 10		
Input Frequency Detection	Auto-sensing		
Rated Input Current (A)	4.5	9	13
Input Power Factor	0.99		
Input Connector Type	IEC C14		IEC C20
Output			
Capacity (VA)	1000	2000	3000
Capacity (Watts)	900	1800	2700
On Battery Waveform	Pure Sine Wave		
On Battery Voltage(s) (Vac)	208 ± 1%, 220 ± 1%, 230 ± 1%, 240 ± 1%		
Output Voltage Setting	Configurable		
On Battery Frequency (Hz)	50 ± 0.5%, 60 ± 0.5%		
Output Frequency Setting	Configurable		
Power Factor	0.9		
Overload Protection	Internal Current Limiting, Circuit Breaker, Fuse		
Overload Protection (Line Mode)	110-120% Load for 1 min, >120% Load Immediately		
Overload Protection (Battery Mode)	110-120% Load for 10 sec, >120% Load Immediately		
Overload Protection (Bypass Mode)	>130% Load Immediately		
Harmonic Distortion (Linear Load)	THD < 3%		
Harmonic Distortion (Non-linear Load)	THD < 5%		
Outlet(s) - Total	8		10
Outlet Type	IEC C13 x 8		IEC C19 x 2, IEC C13 x 8
Outlet(s) - Battery & Surge Protected	8		10
Outlet(s) - Critical Load (CL)	4		6
Outlet(s) - Non-Critical Load (NCL)	4		
Typical Transfer Time (ms)	0		
Battery			
Runtime at Half Load (min)	11	11.9	13.8
Runtime at Full Load (min)	4		4.3
Typical Recharge Time (Hours)	4		
Smart Battery Management (SBM)	Yes		
User-replaceable	Yes - Qualified Personnel Only		
Battery Type	Sealed Lead-acid		
Replacement Battery Pack	RBP0156	RBP0157	RBP0158
RBP Quantity (pcs)	1		
Compatible Extended Battery Module (EBM)	BPSE24V40ART2U	BPSE48V40ART2U	BPSE72V40ART2U
Max. EBM Quantity (pcs)	3		
Surge Protection & Filtering			
Surge Suppression (Joules)	363		388
EMI/RFI Filtration	Yes		
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out		
Management & Communications			
LCD Panel	Yes		
LCD Types	Color LCD		
HID Compliant USB Port(s)	1		
Serial Port	RS232		
Dry Contact (with Relay)	Yes		
Emergency Power Off (EPO) Port	Yes		
Power Management Software	PowerPanel Business (Recommended)		
SNMP/HTTP Remote Monitoring	Yes - with optional RMCARD205		
Physical			
Form Factor	Rackmount, Tower		
Physical Size - UPS Module			
Dimensions (WxHxD) (mm.)	438 x 88 x 430		438 x 88 x 610
Weight (kg.)	13.5	19.2	26.7
Installed Rack Height (U)	2		
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	20 - 90		
Online Thermal Dissipation (BTU/hr)	380	682	911
Certifications			
Certifications*	CE, EAC		
RoHS	Yes		

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.